

ZVOX V-Series Quick Setup

1 Position The V-Series system.



Place the V-Series system on a stable, flat surface. Ensure all components are safe and secure.

2 Make the power connection.



Connect the DC plug of the power supply to the DC IN jack on the back of the V-Series system. Put the Power switch to OFF. Connect the AC cord to the socket on the power supply, then plug the AC cord into an AC power receptacle.

3 Connect to Audio Output of TV.



Optical Audio Output
Connect one end of an optical digital (toslink) cable to the TV's Audio Out optical jack.

4 Connect to Audio Input of V-Series system





V-Series system's Optical Audio Input
Connect the other end of the optical cable to the V-Series system's optical input jack.

5 Flip on the Power.




6 Select the correct input.

Select the optical digital input “dln1” using the remote control **OR** the front panel.

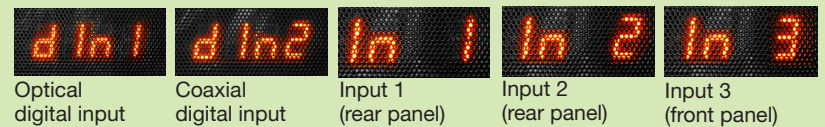


Other Audio Connection Options

Phono Jack Analog Audio Out
White/red pair of phono output jacks (not “input”) on back of TV.

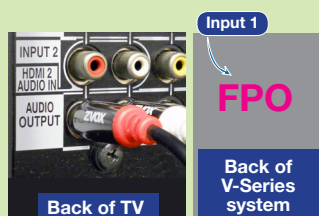

“Minijack” Analog Audio Out
Some TVs use a “minjack” output (not “input”) or headphone jack.

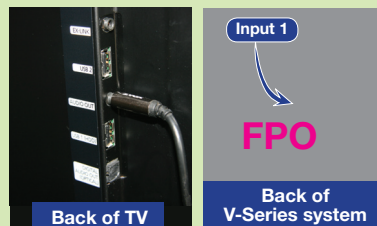

Coaxial Digital Audio Output
(Single phono jack, may be orange)
Any cable with a phono plug at each end can be used.

